



□ D系列 保密柜锁

Duke Series · 公爵系列 Confidential Cabinet Lock

2003年发明业内首款触屏式密码锁，荣获多项国际专利，历时10年，经过百万用户使用验证和不断研发完善，使这款安全产品，高科技附加价值更高，更具人性化设计。

Invented the first integrated keypad lock in the industry in 2003, obtained many national patents, user million customers' using and continual improving make it more stable and safe. Perfect function and humanization design.

设计理念 Design Concept

- 智慧安全，保守秘密
Intelligent and lockageless, Guard Secrets.
- 大胆突破，开创经典
Bold innovation, Develop classic
- 创新设计，不断完美
Innovation design, Improve perfectly.
- 匠心铸造，坚如磐石
Alloy Casting, Strong and Durable
- 表面镀膜，质感细腻
Nickel Plating Panel, Noble and Elegant

功能特点 Features&Benefits

- 密码由1-16位数字任意组合，密码量达1千万组。
User Code Any 1 to 16 Digits Long, Millions of Possible Combinations.
- 密码由用户设定和更改，断电自动保存，永不掉码乱码。
User Codes Are Set and Changed by User, Automatic Save when Power Off, Never Lost and garbled.
- 输入错误密码时开锁，但提示有密码未任何条件。
Immediatly unlock Once Enter User Codes, Thoroughly Give Up Keys and Accessories, Safe and Convenient.
- 内置1号电池使用寿命一年，缺电自动提示。
Can Use One year by 2 x AAA Batteries, Automatic Low Battery Warning.
- 防暴力破坏报警并自动报警。
Automatic Alarm Four Times against Malicious Breaking User Codes.

国保智能箱柜锁


D122 安装说明书

目 录

D122—智能掩门柜锁—安装说明书-----3

D122—智能掩门柜锁—安装说明书

1. 锁体尺寸:

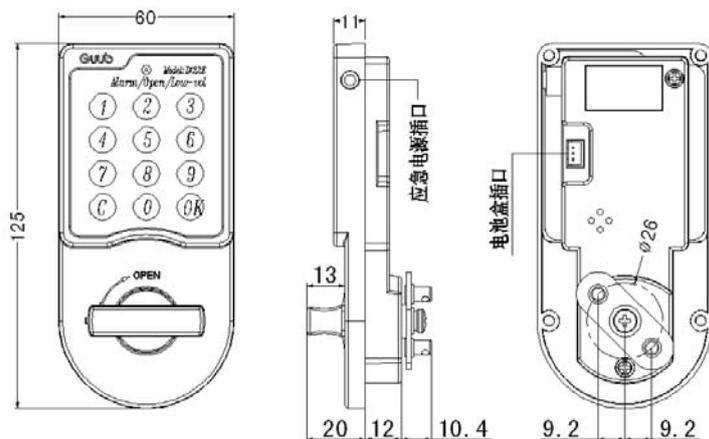


2. 安装配件:

序号	配件名称	数量	用途	图形	备注
1	6V 普通电池盒	1	供电电源		标配
2	Φ4 防滑垫片	4	锁体安装		标配
3	M4 X 8 螺丝	4	锁体安装		标配
4	开口销	2	锁杆安装		标配
5	竖锁栓	2	锁定		标配

3. 适合安装的环境:

钢制掩门柜, 建议门板厚度: 0.5mm—5.0mm。

4. 安装开孔尺寸:

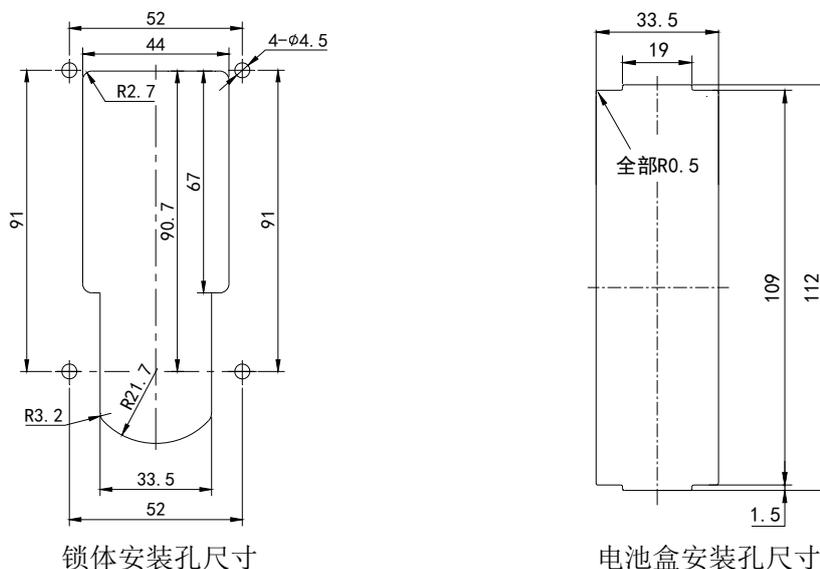

5. 安装示例：

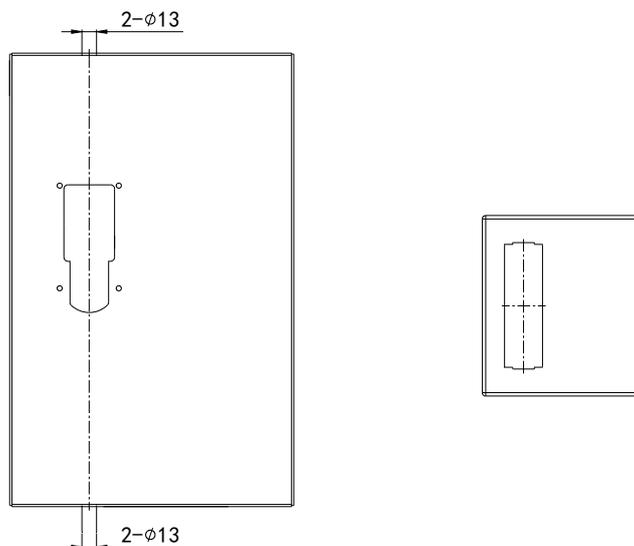


图 5.1—**在门板上冲锁体安装孔**

在后罩上冲电池盒安装孔

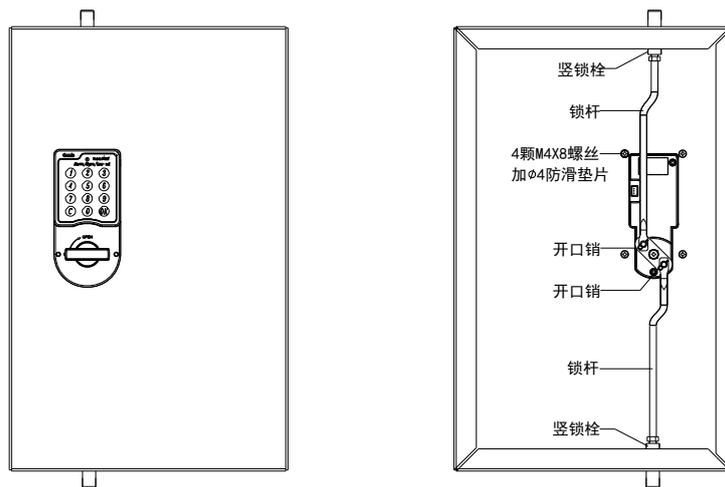


图 5.2—**在门板上安装锁体及拉杆**

安装方法：1、将锁体装入门板安装孔内，在锁背面用四颗 M4 X 8 螺丝和 $\Phi 4$ 防滑垫片把锁体固定；
2、连接上下锁杆，用开口销锁定；

图 5.3—**安装完成后效果如右图**

